

PCT/GB 2004 / 0 0 1 2 1 2



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 20 APR 2004

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)


Signed

Stephen Hordley

Dated

6 April 2004

BEST AVAILABLE COPY

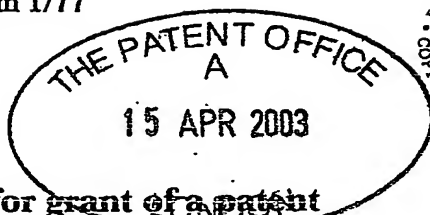

1177
16 APR 2003 E80586-1 001025
01/7700 0-00-0308741-8

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

15 APR 2003

1. Your reference

nak:15927

2. Patent application number

(The Patent Office will fill in this part)

0308741.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

QED Audio Products Ltd
Unit 16, Woking Business Park
Albert Drive
Woking, Surrey, GU21 5JY

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

England and Wales

8611451001

4. Title of the invention

AMPLIFIER ARRANGEMENT AND DISTRIBUTED
AUDIO SYSTEM

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Graham Watt & Co
St Botolph's House, 7-9 St Botolph's Road,
Sevenoaks, Kent TN13 3AJ
GB

Patents ADP number (if you know it)

1685001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	7
Claim(s)	2
Abstract	1
Drawing(s)	3 + 3

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	1 ✓
Request for preliminary examination and search (Patents Form 9/77)	1 ✓
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	-

11.

I/We request the grant of a patent on the basis of this application.

Signature Grah Watt & Co Date

Graham Watt & Co 15 April 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

A D Wadeson 01732 450055

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

Amplifier Arrangement and Distributed Audio System

5 The invention relates to a distributed audio system and amplifier arrangement therefor. A typical distributed audio system comprises of a centralised power supply powering an audio line driver and remote amplifiers within different zones.

10 To reduce system complexity it is desirable for the remote zone's power requirements to be supplied via a centralised supply. It is increasingly desirable to distribute power and signals for audio systems over standard small gauge signal conductors typically less than 26awg. Systems of this type suffer a number of problems; the centralised power supply needs to be of an undesirably high voltage and current capacity to overcome both power loss across the structured wiring cables and also losses at the 'remote' receiving amplifier associated with the line voltage regulation and amplification.

15 Typical structured wiring cables have a limited current capacity that severely restricts the audio level available at the remote location without the use of supplementary power supplies or larger gauge power conductors.

20 Systems of this type must be capable of operating over varying cable lengths dependent on the size of the installation. This leads to varying system performance and potential safety issues with excessive heat build up in confined spaces.

Traditional systems of this type suffer from excessive heat rise and severe thermal limiting of the audio output when the system is under load. This is a result of the amplifier being connected directly to a high supply voltage, necessary to overcome losses across the structured wiring cable.

The present invention seeks to provide distributed audio system, and an amplifier arrangement therefor, which reduces the problems associated power being supplied from remote source, e.g. located in a separate room.

5 According to a first aspect of the present invention there is provided an amplifier arrangement comprising an audio input, an audio output, a switching regulator and a switching amplifier, wherein the switching regulator is arranged to receive a variable DC electrical input from a power supply and output a substantially constant voltage to the switching amplifier. An amplifier arrangement of this nature is much less dependent upon the supply voltage as
10 the regulator supplies the amplifier with a substantially constant supply regardless of the input into the regulator. In this way the power supply can be remote from the amplifier arrangement and so avoid the heat gain and other problems associated with an integrated power supply.

15 It is preferred for the switching amplifier to a digital amplifier. The switching amplifier will often be in the form of a class D digital amplifier with associated H-bridge circuit on the output stage. These are very efficient amplifiers for use with audio amplification. Such digital amplification provides for much greater potential levels of audio amplification compared to e.g. analogue amplifiers.

20 In order to provide the best quality audio reproduction it will often be advantageous for the circuitry of either the switching regulator and/or the switching amplifier to constructed of discrete components rather than integrated circuits.

The switching amplifier will normally be configured to process at least two channels of audio input.

25 Often the amplifier arrangement will further include an auxiliary control device, e.g. to control the audio output volume or audio source e.g. CD, radio, TV, etc. This will generally be situated in the same room as the amplifier arrangement

but may be short distance from the amplifier arrangement in order to be most convenient to the user.

Advantageously, the amplifier arrangement will have the switching regulator and the switching amplifier housed in a single housing. This housing will, of course,
5 not contain the power supply and so operate without the high heat gain and/or other disadvantages associated with previously known installations.

According to a second aspect of the present invention, there is provided a distributed audio installation comprising the amplifier arrangement according to the first aspect of the invention and further including a remote power supply
10 arranged to provide said variable DC electrical input. The distributed audio installation will normally have the power supply connectable to the amplifier arrangement via a cable which varies in length between a preselected maximum e.g. 50m, and a preselected minimum, e.g. 1m. Due to the amplifier arrangement, the distributed audio installation largely avoids the normal
15 disadvantages associated with varying cable length.

The distributed audio system is particularly suitable for use with cables having less than 24awg (137×10^{-3} ohm/m).

The distributed audio system will often be configured so that the power supply is connected to a plurality of amplifier arrangements via respective electrical
20 cables, for example in three, four or even more rooms.

Generally the invention comprises the use of a high efficiency electronic power supply regulator circuit coupled with the use of a high efficiency amplifier circuit used in a remotely powered amplifier system normally as part of a distributed audio installation.

25 The invention thus enables the use of a reduced capacity power supply, lowers power loss across small gauge structured wiring cables, reduces the heat

dissipation of the receiving amplifier system and maintains audio performance over varying lengths of connecting cable. The invention can be viewed as the combined use of switching power supply and amplifier technology applied to the distribution of amplified audio signals across a structured wiring system using small gauge connecting cables system, to yield high system efficiency.

The use of such an approach ensures that audio performance is consistent across a range of cable lengths up to 50m using a centralised power supply. Amplifier system power output remains constant and is not limited by increased thermal dissipation in the audio amplifier due to an ever-increasing power supply voltage as the cable length decreases. At extended cable lengths the use of a high efficiency switching regulator and amplifier ensure that lower cable losses occur resulting in more power being available for a given power supply capacity.

This approach greatly reduces the supply demand on the power cable and increases available output power for the user. It also enables the amplifier system to operate more reliably in confined environments where heat dissipation is normally a problem.

The invention will now be described in relation to the accompanying drawings in which:

FIGURE 1 shows a typical distributed audio system and the location of the invention;

FIGURE 2 shows a block diagram of a preferred embodiment of the invention; and

FIGURE 3 shows a detailed circuit implementation of the embodiment of Figure 2.

Figure 1 depicts a typical distributed audio system which embodies a preferred

example of the invention. The audio source W, which may be one of a variety of audio sources, is fed into a distribution unit T for buffering and transmission. The power supply S supplies current through the connecting cable U to power the remote amplifier system V. Auxiliary control devices X may be connected to the remote amplifier system V as a means of control. The power for such devices is normally supplied by the remote supply S. The remote amplifier system utilising the invention is situated at point V and delivers high-level audio signals to the speakers Q, R.

The cable U is not a fixed length and therefore the impedance of the cable U will vary. Current flowing through the cable U will cause the voltage to drop across points Y, Z. The output voltage of the power supply S has to be high enough to ensure that there is sufficient voltage to operate the remote amplifier system V when the cable U is at its maximum specified length.

Figure 2 shows a block diagram showing the a preferred implementation of the amplifier arrangement according to the first aspect of the invention. The main elements are the switching controller B and the switching amplifier C. The variable DC supply voltage enters the system at point A and may vary between the maximum input voltage and minimum (drop out) voltage of the switching controller B. The switching controller steps down the supply voltage by 'chopping' the supply. The averaging filter P produces output voltage at E equal to the ON time of the output at point D divided by entire duty cycle period at point D and then multiplied by the supply input voltage at point A. The lower the DC input voltage at point A the longer the ON time at point D, the higher the input voltage the shorter the ON time at point D.

The averaged stepped down DC output at E is fed to the switching amplifier's power supply inputs. Audio inputs at points J, K are converted to differential PWM outputs at points H, G and respectively I, F. These are filtered to produce an audio signal voltage suitable for direct input to a loudspeaker system Q, R.

Figure 3 shows an electronic implementation of the invention, though alternatives will be readily apparent to the skilled person. The high efficiency audio system is configured around a high frequency switching amplifier C and switching step down voltage regulation circuit B. Power is supplied to the circuit at point A from a remote power supply Z. Over voltage protection for the switching supply is provided by a high-powered protection diode D3. Schottky Diode D2 protects against damage due to reverse polarity connection. Capacitors C31 and C32 provide filtering and charge storage. The voltage regulation circuit around U2 is a step down switching regulator operating at a frequency of 260kHz.

The efficiency of this regulation circuit is high (typically greater than 90%) because the output FET switching transistor is either ON or OFF producing a pulse width modulated charge current into the inductor L5 at point D, this causes the voltage across C33 to rise. Capacitor C30 connected at point D provides extra gate drive to the output switching FET transistor internal to U2 to ensure that it turns on fully. The output voltage appearing at point E is fed back to a reference circuit within U2 to determine when the output FET transistor within U2 should be turned OFF. At the FET transistor which is internal to U2 turn off point current circulates around the path formed by L5/C33 and the high-speed diode D1. This effectively transfers energy from the inductor L5 to C33 maintaining the output voltage at point E while the FET transistor which is internal to U2 is OFF.

The output voltage and current available at point E is used to feed the power supply inputs of the switching audio amplifier formed around U1. This is a Class D two-channel amplifier using ON/OFF FET switching transistors similar to the regulator circuit formed around U2. The FET transistors in both the Class D amplifier and Voltage regulation circuit are not operated in their linear region so power losses due to heat are very low, efficiency of the amplifier is typically >85%. The device U1 features an H-Bridge output stage, this arrangement enables a high output power to be achieved with a low supply voltage. This is

a particularly preferred aspect of the invention since it enables the combined use of both a switching voltage regulator supply and switching audio amplifier to achieve high power output, and quality which is due to good line voltage regulation over varying supply cable impedances.

5 The amplifier U1 has two identical output circuits built around the filters formed by inductors L2/L1, L4/L3 and respectively capacitors C17/C18, C14/C15. These average the output currents of respectively L2/L1 & L4/L3 with a voltage across the speaker LS2, LS1. The speakers connected at points H, I & F, G form the load of an H bridge driven by an inverted and non-inverted PWM output
10 from U1. The bridge tied load configuration of the speaker results in an output differential voltage of 2x the supply voltage. The audio output voltage across the speakers LS1, LS2 are dependent on the output duty cycle at respectively points M, O and L, N multiplied by the supply voltage. If the duty cycle is 50:50 then there is no audio output. Capacitor C19, C16 provides additional
15 low pass filtering of the switching frequency. An internal ramp oscillator within U1 switches the outputs at 250kHz. An audio signal present at point K, J is compared to a ramp oscillator voltage also internal to U1, if it is greater or less than zero the duty cycle is modulated and the differential PWM output at M, O and L, N results in an amplified audio output voltage across the speaker LS2,
20 LS1.

It will be clear from the foregoing that the present invention generally relates to a remotely powered switching amplifier and power supply arrangement that reduces heat dissipation and increase the efficiency when powered over, particularly but not exclusively, small gauge structured wiring cables.

CLAIMS:

5 1. An amplifier arrangement comprising an audio input, an audio output, a switching regulator and a switching amplifier, wherein the switching regulator is arranged to receive a variable DC electrical input from a power supply and output a substantially constant voltage to the switching amplifier.

2. The amplifier arrangement according to claim 1, wherein the switching amplifier is a digital amplifier.

10 3. The amplifier arrangement according to claim 1 or claim 2, wherein the switching amplifier is a class D digital amplifier with associated H-bridge circuit on the output stage.

4. The amplifier arrangement according to anyone of the preceding claims, wherein the circuitry of either the switching regulator and/or the switching amplifier is constructed of discrete components.

15 5. The amplifier arrangement according to anyone of the preceding claims, wherein the switching amplifier processes at least two channels of audio input.

20 6. The amplifier arrangement according to anyone of the preceding claims, further including an auxiliary control device, e.g. to control the audio output volume.

7. The amplifier arrangement according to anyone of the preceding claims, wherein the switching regulator and the switching amplifier are housed in a single housing.

8. A distributed audio installation comprising the amplifier arrangement

according to anyone of the preceding claims, further including a remote power supply arranged to provide said variable DC electrical input.

- 5
9. The distributed audio installation according to claim 8, wherein the power supply is connectable to the amplifier arrangement via a cable which varies in length between a preselected maximum e.g. 50m, and a preselected minimum, e.g. 1m.
10. The distributed audio system according to claim 9 or claim 10, wherein the cable is less than 24awg (137×10^{-3} ohm/m).
- 10
11. The distributed audio system according to any one of claims 8 to 10, wherein the power supply is connectable to a plurality of amplifier arrangements via respective electrical cables.
12. An amplifier arrangement as hereinbefore described with reference to, and/or as illustrated by, the accompanying drawings.
- 15
13. A distributed audio system as hereinbefore described with reference to, and/or as illustrated by, the accompanying drawings.

ABSTRACT

Amplifier Arrangement and Distributed Audio System

5. The invention relates to a distributed audio system, and an amplifier arrangement therefor, which is configured so that the remotely powered switching amplifier and power supply arrangement reduces heat dissipation and increase the efficiency when powered over, particularly but not exclusively, small gauge structured wiring cables.

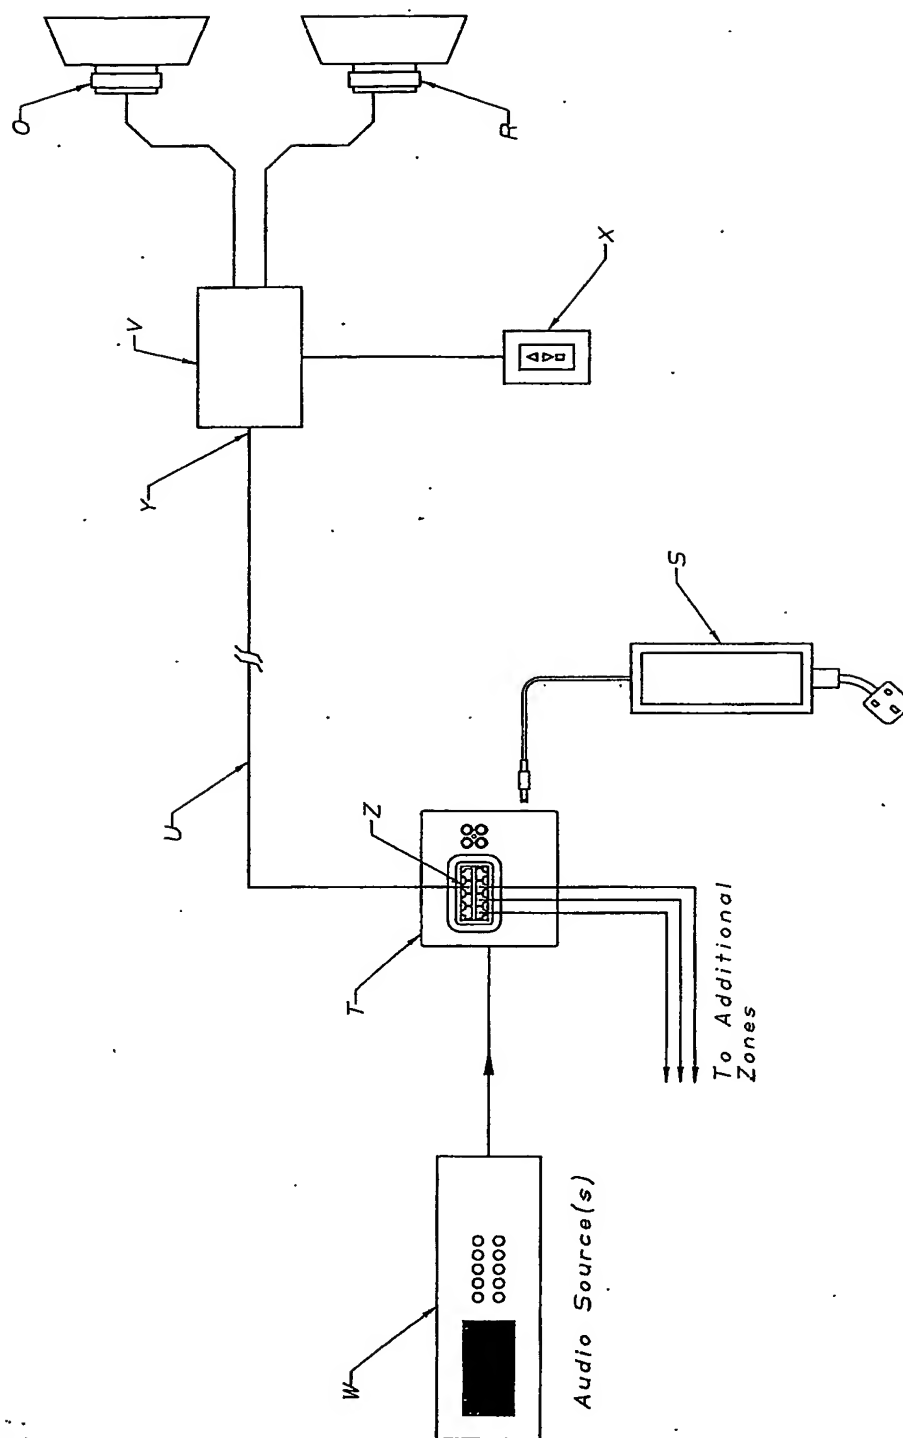


Figure 1.

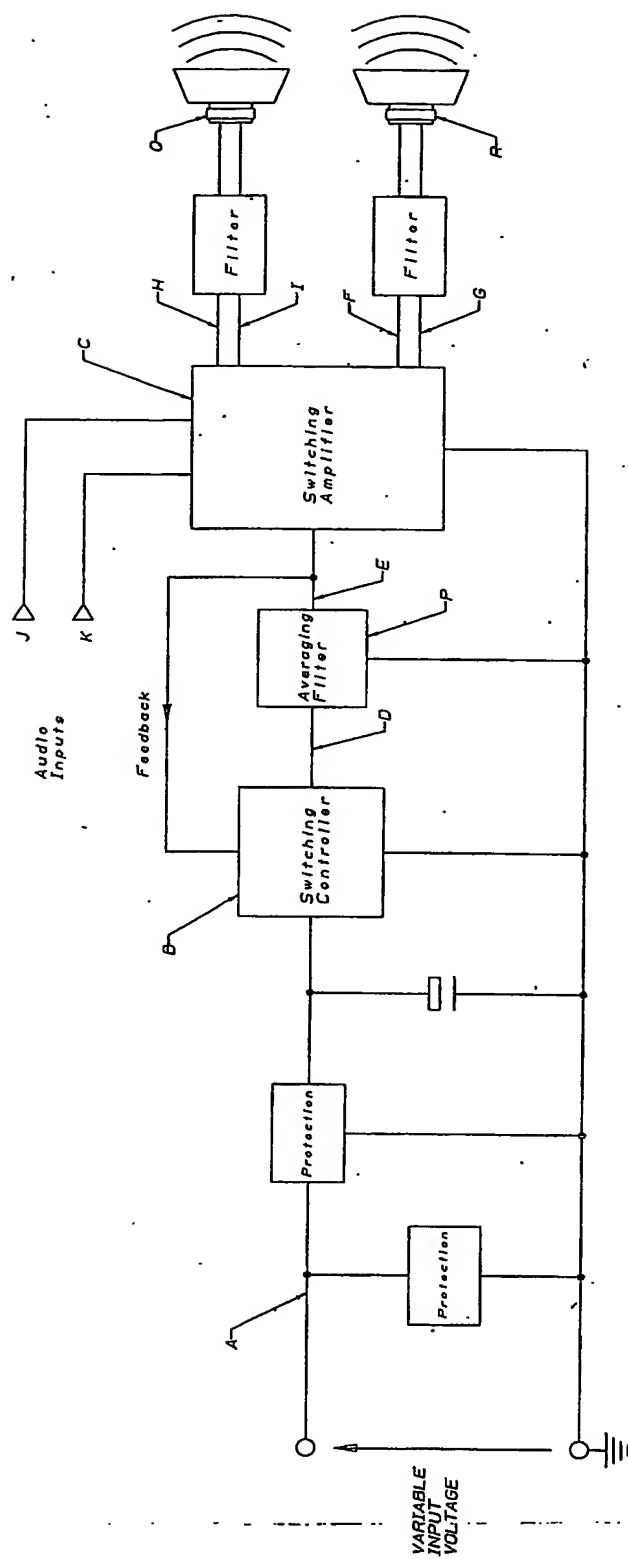


Figure 2.

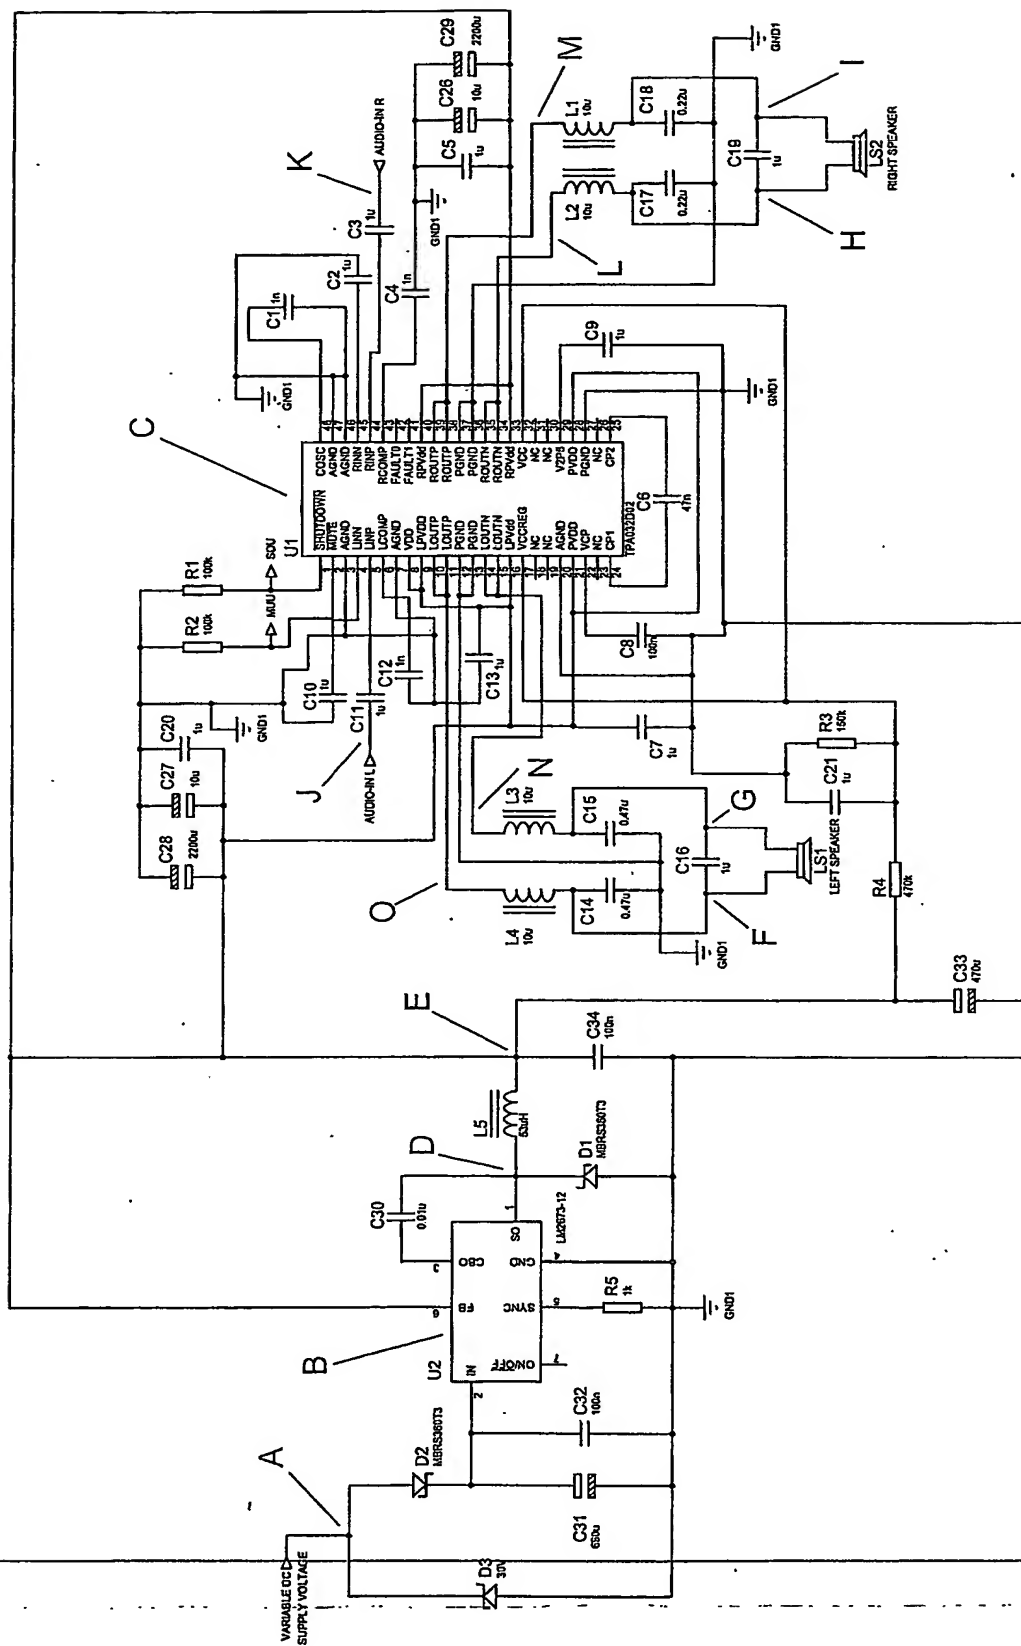


Figure 3.

PCT/GB2004/001212



This Page is inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images
problems checked, please do not report the
problems to the IFW Image Problem Mailbox**